


XDV-47DVPDDN40

3D DNR/ WDR True Day & Night IR Dome Camera

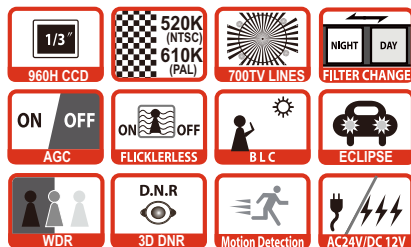

- Sony 1/3" 960H (Super ExView HAD CCD II)
- High Resolution 700 TV Lines
- IR LED (Main): 40 Units 850nm Infrared LED; 20,000 Hours
- Night View Distance (Indoor 45m/ Outdoor 30m)
- 3D DNR (Digital Noise Reduction)
- WDR (Wide Dynamic Range)
- True Day & Night (IR Cut Filter Removable)
- Motion Detection, Privacy Masking
- OSD Menu Function
- 3-Axis Gymbal & Vandal Dome Case


Comparison Image



SPECIFICATIONS:


MODEL		XDV-47DVPDDN40
Image Sensor		Sony 1/3" 960H (Super ExView HAD CCD II)
Total Pixels		1020(H) x 596(V)
Effective Pixels		976(H) x 582(V)
Synchronization	Internal (H/V)	15.625/ 50Hz
	Line Lock (H/V)	15.625/ 50Hz
Scanning System		2:1 Interlace
Horizontal Resolution		700 TV Lines (Max.)
Min. Illumination	Sens-Up Off	0.12 Lux (15IRE), 0.2 Lux (30IRE), 0.4 Lux (50IRE) F1.2
	Sens-Up On	0.0002 Lux (15IRE), 0.0005 Lux (30IRE), 0.0008 Lux (50IRE) F1.2
Video Output		1.0 Vp-p/ 75 Ohm Video 0.714 Vp-p
Gamma		0.45, 0.5, 0.6
S/N Ratio		more than 52 dB (AGC Off)
OSD		Lens, E-Shutter, Backlight, WDR, AGC, Sens-Up, White Balance, Day & Night, Motion, Mirror, Sharpness, Gamma, DNR, Eclipse, Privacy Zones, Communication, Sync., Title, Language, DPC
Electronic Shutter		1/50 ~ 1/100,000
Privacy Masking		8 Windows (Polygonal, 8 Colours)
Day & Night		Colour/ BW/ Auto/ Ext
Motion Detection		On/ Off
Protocol		Pelco-D
Sens-Up (Low Shutter)		Off ~ x512
Sync.		Auto/ Internal/ Digital Line Lock
White Balance		ATW/ AWC/ Manual/ Push
WDR		On/ Off (WDR Level, Weight)
WDR Level		120dB Max.
3D-DNR		On/ Off (Off, Low, Mid, High)
Mirror Function		On/ Off
Nega		On/ Off
Eclipse		On/ Off
AGC (Auto Gain Control)		Low/ Middle/ High/ Off
Lens		ICR 2.8 ~ 12mm DC Auto Iris
IR LED		35 Units 850nm Infrared LED; 20,000 Hours
Beam Spread		36° + 56°
Night View Distance		Indoor 45m/ Outdoor 30m
Operating Temperature/ Humidity		-20°C ~ +60°C/ 30% ~ 80%
Storage Temperature/ Humidity		-30°C ~ +60°C/ 20% ~ 90%
Power Supply (Max.)		DC 12 V, 600mA/ AC 24 V, 260mA
Dimensions		160(Ø) x 130(H) mm
Weight		approx. 1.57Kg

Specifications are subject to change without notice

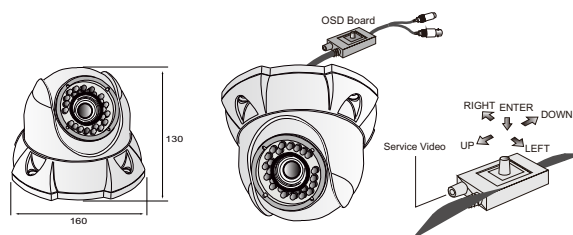

XDV-47DVPDN66

3D DNR/ WDR True Day&Night IR Bullet Camera

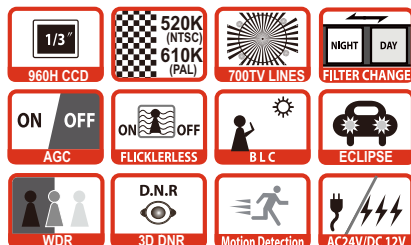

- Sony 1/3" 960H (Super ExView HAD CCD II)
- Min. Illumination: 0.0002 Lux (15IRE) at F1.2
- High Resolution 700 TV Lines
- IR LED (Main): 68 Units 850nm Infrared LED; 20,000 Hours
- Night View Distance (Indoor 50m/ Outdoor 40m)
- 3D DNR (Digital Noise Reduction)
- WDR (Wide Dynamic Range)
- True Day & Night (IR Cut Filter Removable)
- Motion Detection, Privacy Masking
- OSD Menu Function
- Weatherproof IP65

Comparison Image



SPECIFICATIONS:


MODEL		XDV-47DVPDN66
Image Sensor		Sony 1/3" 960H (Super ExView HAD CCD II)
Total Pixels		1020(H) x 596(V)
Effective Pixels		976(H) x 582(V)
Synchronization	Internal (H/V)	15.625/ 50Hz
	Line Lock (H/V)	15.625/ 50Hz
Scanning System		2:1 Interlace
Horizontal Resolution		700 TV Lines (Max.)
Min. Illumination	Sens-Up Off	0.12 Lux (15IRE), 0.2 Lux (30IRE), 0.4 Lux (50IRE) F1.2
	Sens-Up On	0.0002 Lux (15IRE), 0.0005 Lux (30IRE), 0.0008 Lux (50IRE) F1.2
Video Output		1.0 Vp-p/ 75 Ohm Video 0.714 Vp-p
Gamma		0.45, 0.5, 1.0
S/N Ratio		more than 52 dB (AGC Off)
OSD		Lens, E-Shutter, Backlight, WDR, AGC, Sens-Up, White Balance, Day & Night, Motion, Mirror, Sharpness, Gamma, DNR, Eclipse, Privacy Zones, Communication, Sync., Title, Language, DPC
Electronic Shutter		1/50 ~ 1/100,000
Privacy Masking		8 Windows (Polygonal, 8 Colours)
Day & Night		Colour/ BW/ Auto/ Ext
Motion Detection		On/ Off
Sens-Up (Low Shutter)		Off ~ x512
Sync.		Auto/ Internal/ Digital Line Lock
White Balance		ATW/ AWC/ Manual/ Push
WDR		On/ Off (WDR Level, Weight)
WDR Level		120dB Max.
3D-DNR		On/ Off (Off, Low, Mid, High)
Mirror Function		On/ Off
Nega		On/ Off
Eclipse		On/ Off
AGC (Auto Gain Control)		Low/ Middle/ High/ Off
Lens		ICR 3.5 ~ 16mm DC Auto Iris
IR LED		68 Units 850nm Infrared LED; 20,000 Hours
Beam Spread		36° + 56°
Night View Distance		Indoor 50m/ Outdoor 40m
Operating Temperature/ Humidity		-20°C ~ +60°C/ 30% ~ 80%
Storage Temperature/ Humidity		-30°C ~ +60°C/ 20% ~ 90%
Power Supply (Max.)		DC 12 V, 900mA/ AC 24 V, 350mA
Dimensions		94(Ø) x 156(L) mm
Weight		approx. 1.66Kg

Specifications are subject to change without notice



XDV-47DVPIR66

3D DNR/ WDR Day&Night IR Bullet Camera

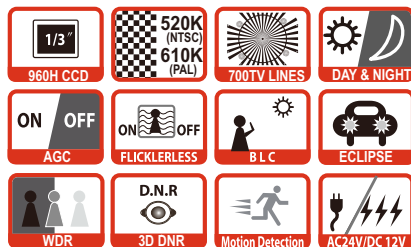

- Sony 1/3" 960H (Super ExView HAD CCD II)
- Min. Illumination: 0.0002 Lux (15IRE) at F1.2
- High Resolution 700 TV Lines
- IR LED (Main): 68 Units 850nm Infrared LED; 20,000 Hours
- Night View Distance (Indoor 40m/ Outdoor 30m)
- 3D DNR (Digital Noise Reduction)
- WDR (Wide Dynamic Range)
- Day & Night
- Motion Detection, Privacy Masking
- OSD Menu Function
- Weatherproof IP65

Comparison Image



SPECIFICATIONS:

MODEL		XDV-47DVPIR66
Image Sensor		Sony 1/3" 960H (Super ExView HAD CCD II)
Total Pixels		1020(H) x 596(V)
Effective Pixels		976(H) x 582(V)
Synchronization	Internal (H/V)	15.625/ 50Hz
	Line Lock (H/V)	15.625/ 50Hz
Scanning System		2:1 Interlace
Horizontal Resolution		700 TV Lines (Max.)
Min. Illumination	Sens-Up Off	0.12 Lux (15IRE), 0.2 Lux (30IRE), 0.4 Lux (50IRE) F1.2
	Sens-Up On	0.0002 Lux (15IRE), 0.0005 Lux (30IRE), 0.0008 Lux (50IRE) F1.2
Video Output		1.0 Vp-p/ 75 Ohm Video 0.714 Vp-p
Gamma		0.45, 0.6, 1.0
S/N Ratio		more than 52 dB (AGC Off)
OSD		Lens, E-Shutter, Backlight, WDR, AGC, Sens-Up, White Balance, Day & Night, Motion, Mirror, Sharpness, Gamma, DNR, Eclipse, Privacy Zones, Communication, Sync., Title, Language, DPC
Electronic Shutter		1/50 ~ 1/100,000
Privacy Masking		8 Windows (Polygonal, 8 Colours)
Day & Night		Colour/ BW/ Auto/ Ext
Motion Detection		On/ Off
Sens-Up (Low Shutter)		Off ~ x512
Sync.		Auto/ Internal/ Digital Line Lock
White Balance		ATW/ AWC/ Manual/ Push
WDR		On/ Off (WDR Level, Weight)
WDR Level		120dB Max.
3D-DNR		On/ Off (Off, Low, Mid, High)
Mirror Function		On/ Off
Nega		On/ Off
Eclipse		On/ Off
AGC (Auto Gain Control)		Low/ Middle/ High/ Off
Lens		3.5 ~ 16mm DC Auto Iris
IR LED		68 Units 850nm Infrared LED; 20,000 Hours
Beam Spread		36° + 56°
Night View Distance		Indoor 40m/ Outdoor 30m
Operating Temperature/ Humidity		-20°C ~ +60°C/ 30% ~ 80%
Storage Temperature/ Humidity		-30°C ~ +60°C/ 20% ~ 90%
Power Supply (Max.)		DC 12 V, 900mA/ AC 24 V, 350mA
Dimensions		94(Ø) x 156(L) mm
Weight		approx. 1.51Kg

Specifications are subject to change without notice

